

Extreme cyclic Battery

EXC-300



power the future



• Main Applications

- Renewable energy (wind & solar) storage system
- Peak shifting of electrical power system
- Frequency regulation and Load following service
- Smart-grid & micro-grid sites
- All extreme environment (Off-grid & bad-grid sites)

• Benefits

- Extra long life design, design life is 25 years, help user reduce greatly operating cost
- Ultra-high cycling performance in both PSoC and deep cycling applications
- Super quick charge performance, reduce charging time by 50%
- More cost effective than nearest equivalent when used in energy storage system


• Technical Features

- Comply with GB/T 22473、BS EN61427-1: 2013、IEC61427-2: 2015 standards, etc
- Adopt lead carbon technology, reduce the cathode sulphation, ideal for PSoC cycle application and can deliver 7~8 times better cyclic life compared with normal VRLA
- Exceptional fast charge acceptability
- Distinctive design for premium quality, high reliability and stability

• Technical Parameters

Normal Voltage	2V
Capacity	300 Ah @10hr to 1.80V per cell @ 25°C(77°F)
Weight	28.3 kg (62.4 lbs)
Dimensions	Length: 154 mm (6.06 in) Width: 207 mm (8.15 in) Height: 358 mm (14.09 in) Total height: 372 mm (14.65 in)
Internal Resistance (full charged)	0.30mΩ (According to IEC 60896-21)
Short- circuit current	6400A (According to IEC 60896-21)
Self Discharge @ 25°C(77°F)	Less than 4 % after 30 days storage
Operating Temperature Range	Discharge: -40°C ~ 50°C(-40°F ~ 122°F) Charge: -20°C ~ 50°C(-4°F ~ 122°F) Storage: -20°C ~ 40°C(-4°F ~ 104°F)
Recommended Operating Temperature	15°C ~ 25°C(59°F ~ 77°F)
Recommended Charging Current	60A
Charging Voltage @25°C(77°F)	2.30~2.35 V/cell
Terminal	M8
Capacity Affected by Temperature(C ₁₀)	105 % @ 40°C 90 % @ 0°C 40 % @ -20°C
Design life @25°C(77°F)	25 years

• Dimensions :

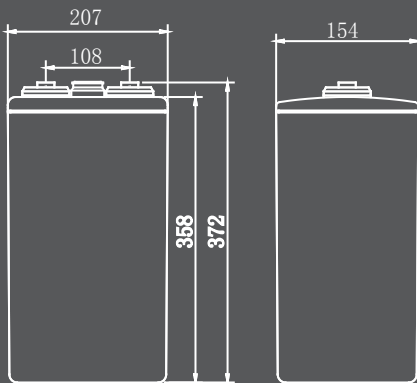

• Compliant standards :

- ★ GB/T 22473-2008
- ★ BS EN 61427-1: 2013
- ★ IEC 61427-2: 2015
- ★ IEC 60896-21/22

• Attain certificate :

- ☑ ISO9001
(NO.03009Q10083R2M)
- ☑ ISO14001
(NO.03010E10145R0M)
- ☑ GB/T28001
(NO.03010S10141 R0M)

Extreme cyclic Battery

EXC-300



power the future



• Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


F.V/Time	15min	30min	1hr	3hr	5hr	8hr	10hr	20hr	48hr
1.75V	428.4	272.2	182.1	83.8	58.1	40.6	33.9	18.2	7.7
1.80V	350.9	255.2	170.1	81.3	56.7	39.8	33.1	17.9	7.6
1.85V	308.7	227.4	153.7	76.9	54.7	38.6	32.2	17.2	7.4
1.90V	262.7	195.3	136.1	71.8	52.7	37.3	31.1	16.9	7.2

• Constant Power Discharge Characteristics Unit: W (25°C, 77°F)


F.V/Time	15min	30min	1hr	3hr	5hr	8hr	10hr	20hr	48hr
1.75V	681	543	366	171	113	80	66	38.1	16.2
1.80V	649	523	358	166	110	77	65	37.4	15.9
1.85V	591	465	326	156	106	75	62	35.9	15.3
1.90V	513	393	281	146	103	69	58	34.8	14.8

• Performance curve :


Upo (V) **Discharge Performance at Different Discharge Rate@25°C**

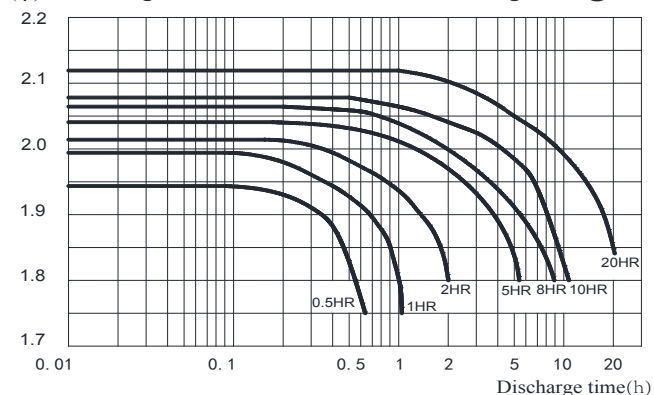


Current (I10A) Voltage (V/cell) **Constant Voltage Charge Characteristics@25°C** Capacity (%)

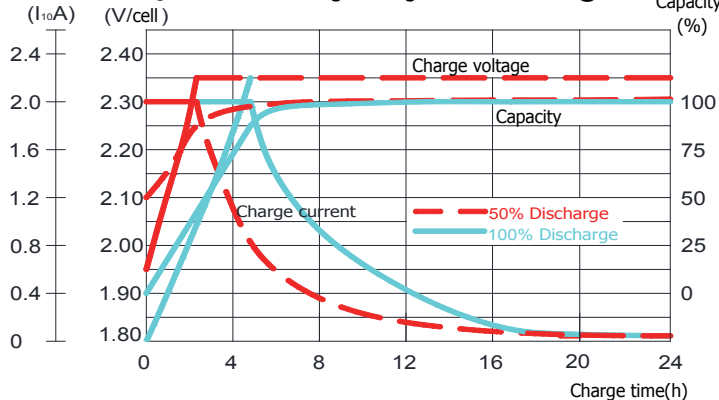

Capacity at Different Temperature

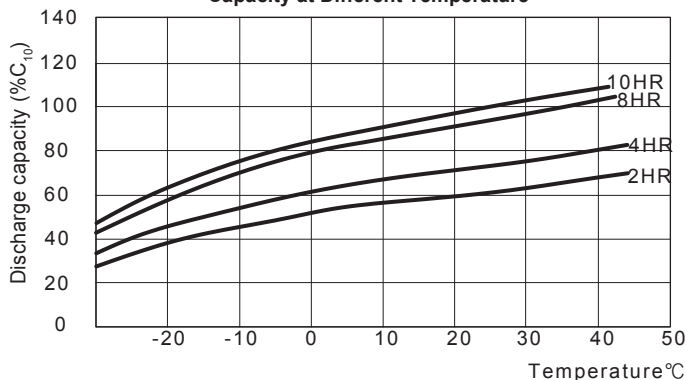

Capacity(%) **Curve of Self-discharge at Different Temperature**

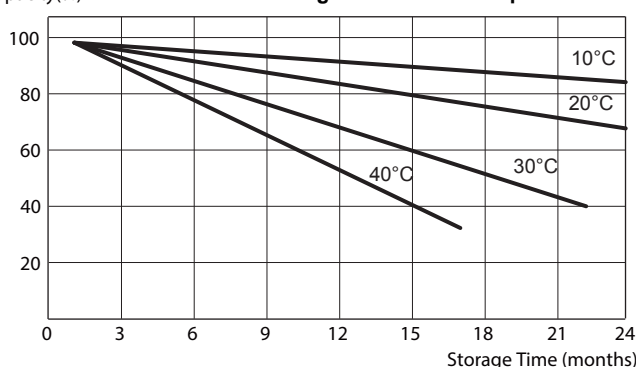

Declaration: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact CHINASHOTO for the latest information.

Welcome to Visit: www.chinashoto.com